
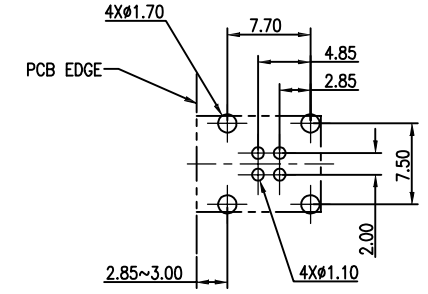

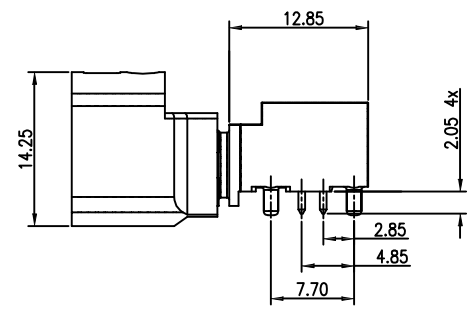



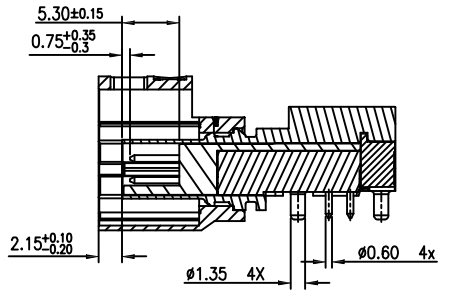


QTY	NEXT ASSEMBLY	QTY	NEXT ASSEMBLY

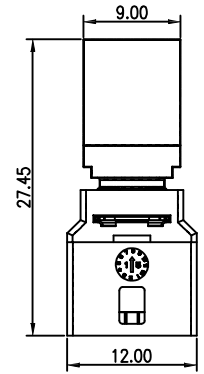

推荐的PCB布局顶视图
TOLERANCE:±0.05(PCB THICKNESS=1.6±0.15mm)

Plug	Coding	Color	Part Number
	A	墨黑色	1222050002
	B	奶油色	1222050006
	C	信号蓝色	1222050010
	D	酒红紫色	12220500**
	E	叶绿色	12220500**
	F	深棕色	12220500**
	Z	水蓝色	1222050014

技术条件:
 塑胶材质: 外壳塑胶PA4T, 颜色见表; 胶芯LCP, 黑色;
 中心接触: 铜合金, 镀金0.15um;
 外屏蔽: 锌合金, 镀锡1.27um;
 外接电阻: ≤7.5mΩ
 内接触电阻: ≤10mΩ
 绝缘电阻: ≥1000MΩ
 阻抗: 100Ω
 回波损耗: ≥20 dB to 1.0 GHz
 ≥17 dB to 2.0 GHz
 插入损耗: ≥0.1 dB @ 1.0 GHz

产品符合ROHS环保标准;
 注明 * 为关键尺寸;

PARTS CAN BE COMPLY WITH ROH'S REQUIREMENT	
<input type="checkbox"/> CANCEL OLD DRAWING P/N:	
MATL & COLOR PA4T LCP 锌合金	<input type="checkbox"/> ALL TOOL DIMENSIONS <input checked="" type="checkbox"/> ALL PRODUCT DIMENSIONS &
ROUGHNESS	TEXTURE
HARDNESS	COATING
PROCESS	JOINING
STANDARDS	
UNLESS OTHERWISE STATED WALL THICKNESS MM/INCH LINEAR .X ± 0.1 MM/INCH .XX ± 0.05MM/INCH ANGULAR ± 0.5 DEGREE DRAFT ANGLE / SIDE 0.5 °MAX BURR & FLASH 0.05 MAX BREAK CORNERS 0.1 R, MAX	

△ ×					
△ ×					
△ ×					
△ ×					
△ ×					
HISTORY X COUNT	ECN-NO DATE	REVISION	CHKR	SIGN	
东莞商通电子有限公司 DONGGUAN SHANGTONG ELECTRONICS CO.,LTD					
TITLE HSD LVDS 4P卧式针座 (THR)				DIE/MOULD NO.:	
PROJECT				SCALE 2:1	
DGNS	DFTS	CHKR	APPD	SHT 1 OF 1 PART NO 2018-12-15	
料号详见左边表					